




Logitech Harmony Smart Control Light Bulb Replacement

In this replacement guide it will provide direction for disassembly of the harmony hub to access bulbs for replacement.

Written By: Josh Hendricks

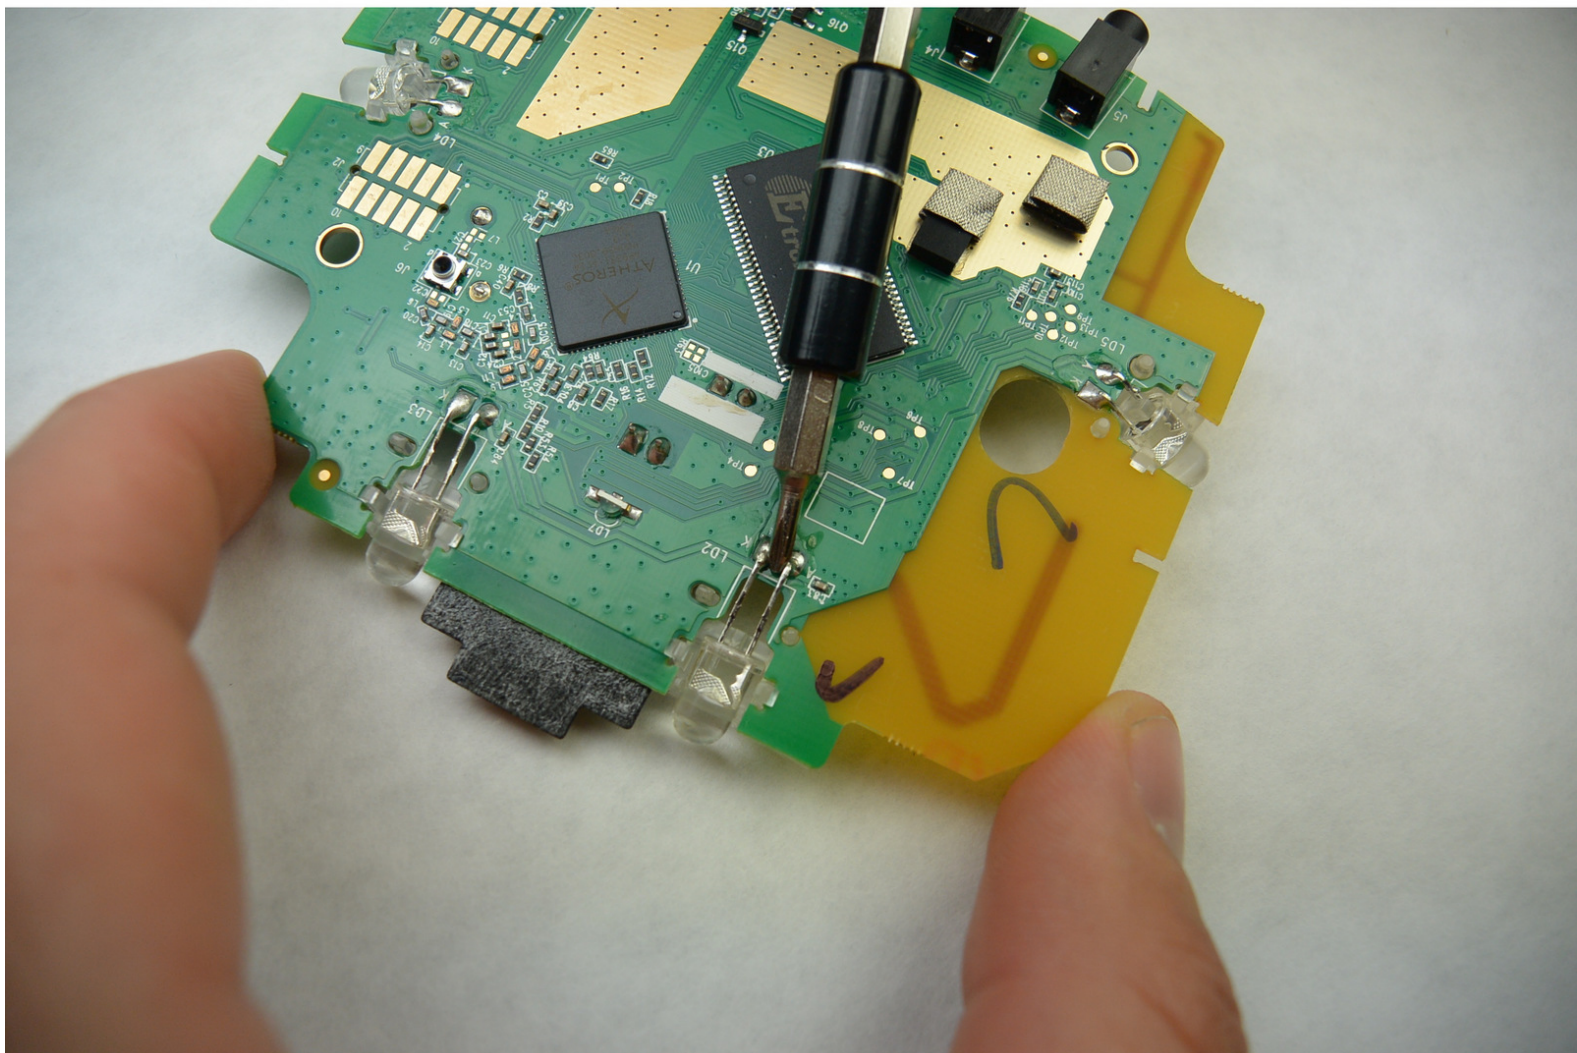

INTRODUCTION

This guide requires soldering, for soldering guide click below.

[Soldering Guide](#)



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Soldering Station](#) (1)



PARTS:

- [Solder](#) (1)
-

Step 1 — Light Bulb




- Use plastic opening tool to lift up rubber pad.
- With your fingers pull back rubber pad, exposing screw holes on bottom of device.
- Repeat for second rubber pad on bottom of hub.

Step 2





- Remove the four 6mm Phillip screws, with the PH00 bit.

Step 3

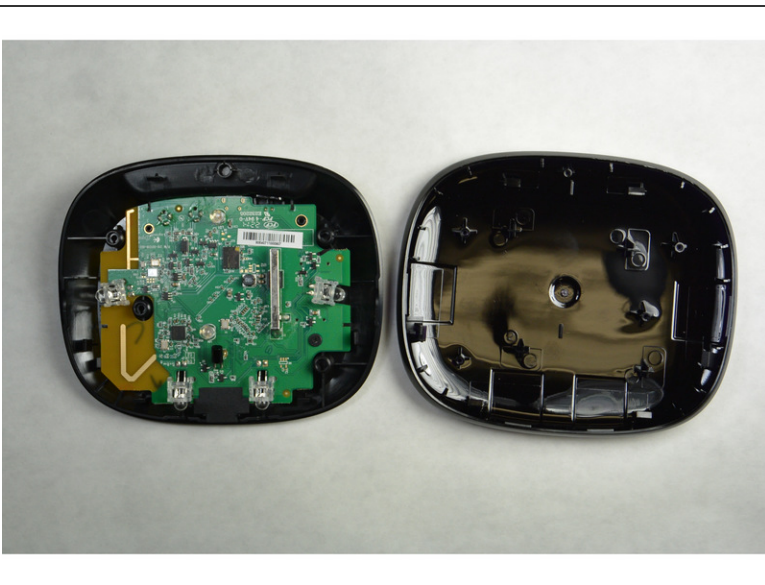


- Use the plastic opening tool to separate the pieces of plastic from each other.

Step 4

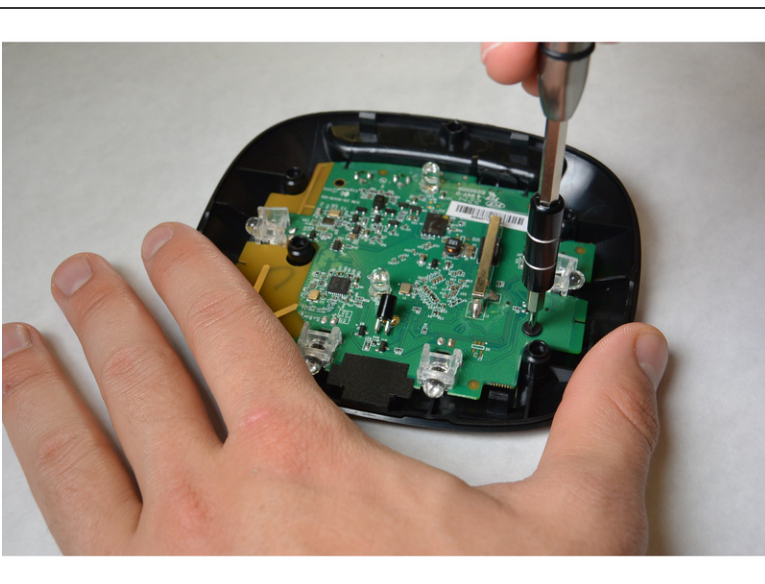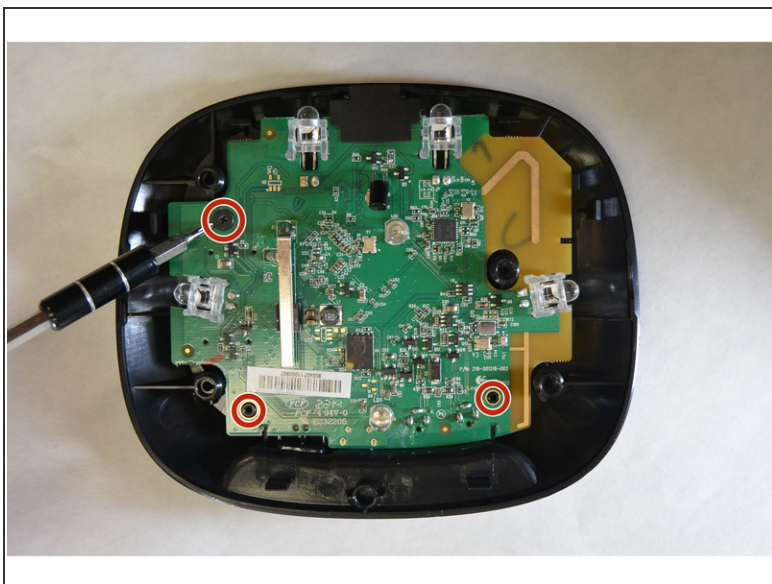




- Remove the three 4mm Phillip screws, with the PH00 bit.

Step 5

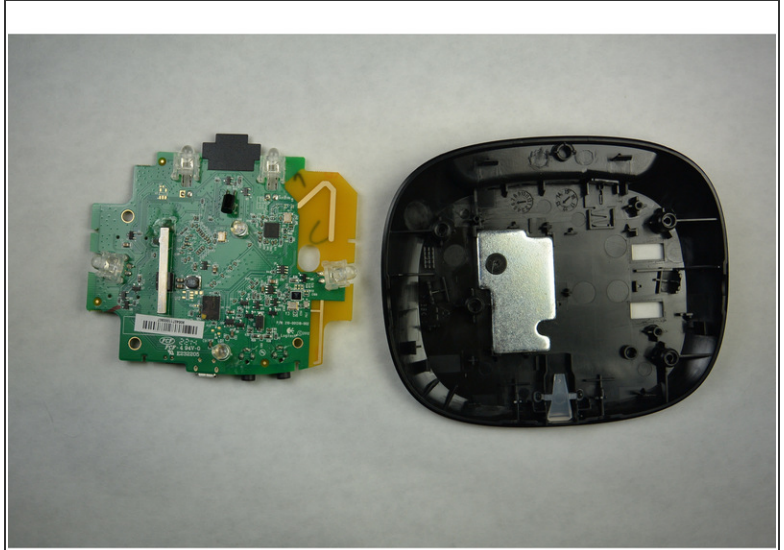

- Pry circuit board from housing using yellow corner.

Step 6

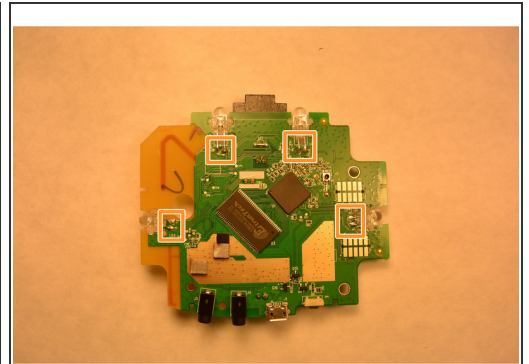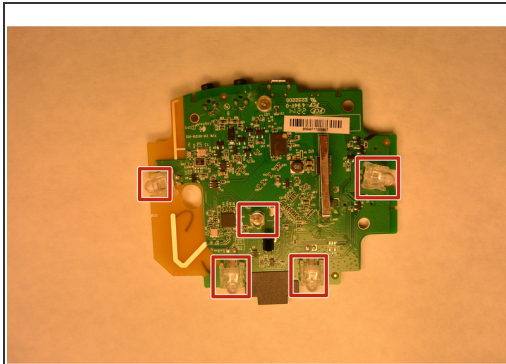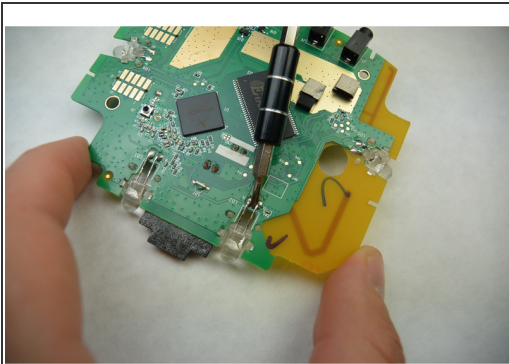

- Locate which of the five bulbs are defective.
- Flip board to expose bulb solder
- Using soldering iron, remove solder and bulb. Replace bulb and re-solder.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-12 03:25:08 AM.